


OVERVIEW

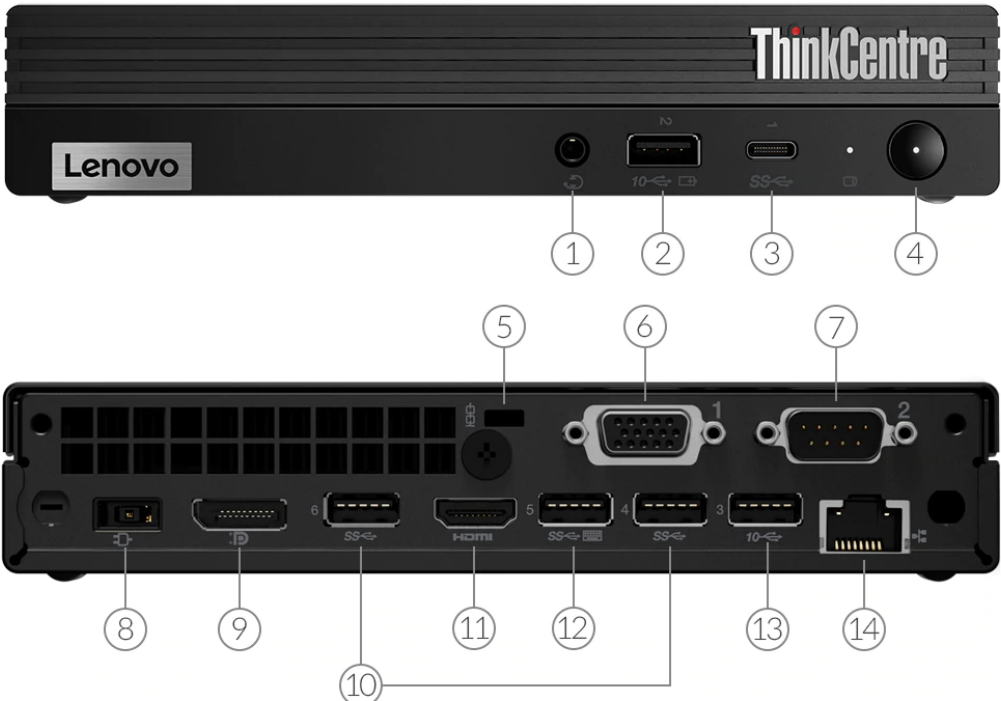

1. Headphone / microphone combo jack (3.5mm)	8. Power connector
2. USB 3.2 Gen 2	9. DisplayPort
3. USB-C 3.2 Gen 1	10. USB 3.2 Gen 1
4. Power button	11. HDMI
5. Kensington Security Slot	12. USB 3.2 Gen 1
6. Optional port 1 (VGA is shown)	13. USB 3.2 Gen 2
7. Optional port 2 (serial is shown)	14. Ethernet (RJ-45)

PERFORMANCE

Processor

Processor Family

Intel® Celeron®, Intel Pentium®, or 10th Generation Intel Core™ i3 / i5 / i7 / i9 Processor

Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Celeron G5900T	2	2	3.2GHz	-	2MB	DDR4-2666	Intel UHD Graphics 610
Celeron G5905T	2	2	3.3GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Pentium Gold G6400T	2	4	3.4GHz	-	4MB	DDR4-2666	Intel UHD Graphics 610
Pentium Gold G6500T	2	4	3.5GHz	-	4MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10100T	4	8	3.0GHz	3.8GHz	6MB	DDR4-2666	Intel UHD Graphics 630
Core i3-10300T	4	8	3.0GHz	3.9GHz	8MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10400T	6	12	2.0GHz	3.6GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10500T	6	12	2.3GHz	3.8GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i5-10600T	6	12	2.4GHz	4.0GHz	12MB	DDR4-2666	Intel UHD Graphics 630
Core i7-10700T	8	16	2.0GHz	4.5GHz	16MB	DDR4-2933	Intel UHD Graphics 630
Core i9-10900T	10	20	1.9GHz	4.6GHz	20MB	DDR4-2933	Intel UHD Graphics 630

Operating System

Operating System

- Windows® 10 Home 64
- Windows 10 Pro 64
- Windows 10 IoT Enterprise
- Ubuntu Linux
- No operating system

Graphics

Graphics^[1]

Graphics	Type	Memory	Connector	Max Resolution	Key Features
Intel UHD graphics 610	Integrated	Shared	1x HDMI®, 1x DP, 1x optional video port (2nd HDMI / VGA / 2nd DP / USB-C / dual DP)	4096x2160@24Hz(onboard HDMI), 4096x2304@60Hz(DP), 3840x2160@60Hz(Dual DP, MST mode), 2048x1536@50Hz(VGA), 4096x2304@60Hz(USB-C)	DirectX® 12
Intel UHD graphics 630	Integrated	Shared	1x HDMI, 1x DP, 1x optional video port (2nd HDMI / VGA / 2nd DP / USB-C / dual DP)	4096x2160@24Hz(onboard HDMI), 4096x2304@60Hz(DP), 3840x2160@60Hz(Dual DP, MST mode), 2048x1536@50Hz(VGA), 4096x2304@60Hz(USB-C)	DirectX 12

Notes:

1. The information of integrated graphics are not applicable for the models without integrated graphics (for the details, please refer to processor section)

Monitor Support

Monitor Support

Supports up to 3 independent displays via two onboard ports (DP + HDMI) + one optional port (VGA / 2nd DP / 2nd HDMI / USB-C) , or via one onboard (DP / HDMI) + optional dual DP (MST mode)

Chipset

Chipset

Intel H470 chipset

Memory

Max Memory^[1]

Up to 64GB DDR4-2933

Memory Slots

Two DDR4 SO-DIMM slots, dual-channel capable

Memory Type^[2]

- DDR4-2666
- DDR4-2933

Memory Protection

Non-ECC

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.
2. Installed memory is actually 3200MHz, but may run at 2666MHz or 2933MHz, depending on the memory support capability of processor

Storage

Storage Support

Up to two drives, 1x 2.5" HDD + 1x M.2 2242/2280 SSD

- 2.5" HDD up to 1TB
- M.2 SSD up to 2TB
- Optional Intel Optane™ Memory, M.2

Storage Type

Disk Type	Interface	RPM	Security
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	Opal
2.5" SATA HDD	SATA 6Gb/s	7.2K	-
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x2	-	-
M.2 2242 SSD	PCIe NVMe, PCIe 3.0 x4	-	-
M.2 2280 SSD	PCIe NVMe, PCIe 3.0 x4	-	-
Intel Optane Memory M10	PCIe NVMe, PCIe 3.0 x2	-	-

RAID

No support

Removable Storage

Optical

- DVD-ROM, slim (9.0mm), via USB external ODD box
- DVD burner (DVD±RW), slim (9.0mm), via USB external ODD box
- None

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC233VB codec or ALC897Q codec

Speakers

Single speaker, 1.5W x1

Power Supply

Power Supply

Power	Type	Efficiency	Key Features
65W	Adapter	89%	Autosensing
90W	Adapter	89%	Autosensing
135W	Adapter	89%	Autosensing
No power supply	-	-	-

DESIGN

Input Device

Keyboard

- Lenovo Calliope Keyboard (USB connector), black
- Lenovo Calliope Wireless Keyboard (2.4GHz via USB receiver), black
- Lenovo Traditional Keyboard (USB connector), black
- No keyboard

Mouse

- Lenovo Calliope Wireless Mouse (2.4GHz via USB receiver), black
- Lenovo Calliope Mouse (USB connector), black
- Lenovo Fingerprint Mouse (USB connector), Windows Hello support, black
- No mouse

Mechanical

Form Factor

Tiny (1L)

Dimensions (WxDxH)

Models	Dimensions
Tiny only	179 x 183 x 34.5 / 37 mm with rubber feet (7.05 x 7.2 x 1.36 / 1.5 inches with rubber feet)
With VESA mount & ODD box	187 x 183.8 x 66.5 mm (7.36 x 7.24 x 2.62 inches)

Weight

Models	Weight
Tiny only	1.25 kg (2.76 lbs)
With VESA mount & ODD box	1.74 kg (3.84 lbs)

Case Color

Black

Bays

1x 2.5" disk bay

Expansion Slots

Two M.2 slots (one for WLAN, one for SSD)

EOU

(Optional) Toolless chassis open (Toolless Chassis Screw required) and toolless M.2 SSD, HDD, memory assembly / removal

Stand

- Vertical stand
- No stand

Mounting

- VESA mount bracket kit, supports VESA 75mm and 100mm
- Not configured

Others

- (Optional) Dust Filter
- (Optional) Power adapter cage

CONNECTIVITY**Network****Onboard Ethernet**

Gigabit Ethernet, Intel Ethernet Connection I219-V, 1x RJ45, supports Wake-on-LAN

Optional Ethernet

No optional Ethernet

WLAN + Bluetooth™

- Realtek RTL8822CE, 802.11ac Dual Band 2x2 Wi-Fi + Bluetooth 5.0, M.2 card
- Intel Wireless-AC 9462, 802.11ac Dual Band 1x1 Wi-Fi + Bluetooth 5.0, M.2 card
- Intel Wireless-AC 9560, 802.11ac Dual-Band 2x2 Wi-Fi + Bluetooth 5.0, M.2 card
- Intel Wi-Fi 6 AX201, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card
- No WLAN and Bluetooth

Ports^[1]**Front Ports**

- 1x USB 3.2 Gen 2 (Always On and fast charge)
- 1x USB-C 3.2 Gen 1
- 1x headphone / microphone combo jack (3.5mm)

Optional Front Ports

None

Rear Ports^[2]

- 3x USB 3.2 Gen 1
- 1x USB 3.2 Gen 2
- 1x Ethernet (RJ-45)
- 1x HDMI
- 1x DisplayPort™

Optional Rear Ports

- Optional Port 1 (One of VGA / 2nd DisplayPort / 2nd HDMI / serial / USB-C 3.2 Gen 1 with DisplayPort function)
- Optional Port 2 (serial)
- Dual USB 3.2 Gen 1 ports (share one USB 3.2 Gen 1 bandwidth, occupy optional port 1 and 2)
- Dual DisplayPort ports (occupy Optional Port 1 and 2)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt™ 3: 40 Gbit/s;
FireWire 400: 400 Mbit/s;
FireWire 800: 800 Mbit/s
2. For video ports on discrete graphics, please see graphics section

Monitor Cable**Monitor Cable**

- DP to VGA dongle
- DP to dual DP dongle
- HDMI to HDMI Cable (1.5m)
- HDMI to VGA Dongle
- DP to DVI-D dongle
- DP to HDMI 1.4 dongle

- DP to VGA Cable (1.5M)
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Security Slot

Chassis Intrusion Switch

Chassis intrusion switch

Fingerprint Reader

- Touch style fingerprint reader on mouse
- No fingerprint reader

BIOS Security

- Power-on password
- Administrator password
- Hard disk password
- Boot sequence control
- Boot without keyboard and mouse
- Smart USB protection (allows keyboard / mouse only, blocks all storage devices)
- Individual USB port disablement

MANAGEABILITY

System Management

System Management

None

SERVICE

Warranty

Base Warranty

- 1-year depot service
- 1-year limited onsite service
- 3-year limited onsite service
- No base warranty

ENVIRONMENTAL

Operating Environment

Temperature

- Storage: -40°C (-40°F) to 60°C (140°F)
- Operating: 5°C (41°F) to 35°C (95°F)

Humidity

- Operating: 20% to 80%
- Storage: 10% to 90%

Altitude

- Operating: -15.2 m (-50 ft) to 3048 m (10,000 ft)
- Storage: -15.2 m (-50 ft) to 12192 m (40,000 ft)

CERTIFICATIONS

Green Certifications

Green Certifications

- (Optional) EPEAT™ Gold
- (Optional) EPEAT Silver
- ENERGY STAR® 8.0
- ErP Lot 3
- TCO Certified 8.0
- RoHS compliant

Other Certifications

Other Certifications

- (Optional) TÜV Low Noise certified
- (Optional) TÜV Ultra Low Noise certified
- None

Mil-Spec Test

MIL-STD-810H military test passed (Low Pressure [Altitude], High Temperature, Low Temperature, Temperature Shock, Humidity, Sand and Dust, Vibration, Shock, Fungus, Solar Radiation)

